
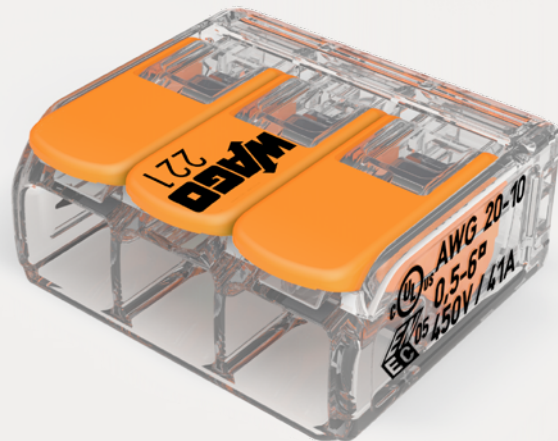



## 221 Series

The Way to Connect!

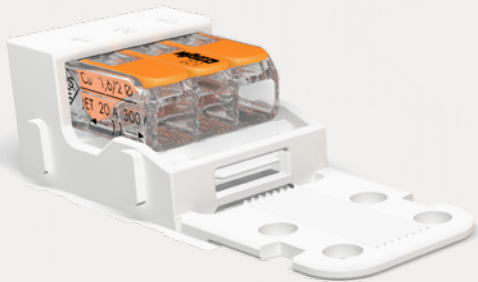

# WAGO 221

## COMPACT Splicing Connectors for All Conductor Types



221-413,  
4 mm<sup>2</sup> variant


221-613,  
6 mm<sup>2</sup> variant

- Continuous service temperature: max. 105°C
- Ambient temperature: max. 85°C (T85)



Carrier			
	Description	Item No.	Pack. Unit
	Strain relief plate; for 221-500 Mounting Carrier	222-505	1
	Mounting carrier; for 2-, 3- and 5-wire connectors; 4 mm <sup>2</sup> variant	221-500	1
	Angled DIN-rail adapter; for horizontal mounting of 221-500 carrier on DIN-35 rail	222-510	1
	Mounting carrier; for 2-, 3- and 5-wire connectors; 6 mm <sup>2</sup> variant	221-510	1

NEW



Two test slots



Industry's widest range of conductor sizes

- Combine any type and size of conductors



Transparent housing

- Clearly identify if the conductor has been stripped and inserted properly

### 4 mm<sup>2</sup> variant

0.14 ... 4 mm<sup>2</sup> 450 V / 4 kV / 2  
0.2 ... 4 mm<sup>2</sup> 32 A

	Description	Item No.	Pack. Unit
	2-wire connectors	221-412	100
	3-wire connectors	221-413	50
	5-wire connectors	221-415	25

### 6 mm<sup>2</sup> variant

0.5 ... 6 mm<sup>2</sup> 450 V / 4 kV / 2  
41 A

	Description	Item No.	Pack. Unit
	2-wire connectors	221-612	50
	3-wire connectors	221-613	40
	5-wire connectors	221-615	20

NEW

### Carrier

	Description	Item No.	Pack. Unit
	Mounting carrier; for 2-wire connectors; for screw mounting	221-502	1
	Mounting carrier; for 3-wire connectors; for screw mounting	221-503	1
	Mounting carrier; for 5-wire connectors; for screw mounting	221-505	1

NEW

Now available from your electrical wholesalers

info@wago.com – [www.wago.com/221](http://www.wago.com/221)